

VELOURS ZEUS CS



Extra-heavyweight synthetic stage velvet. Permanently flame retardant. Oekotex 100 certified (Class 4)

SPECIFICATIONS

Item	Width	Length	Weight	Composition
1211	140 cm	± 25 m	620 g/m ²	100% PES FR

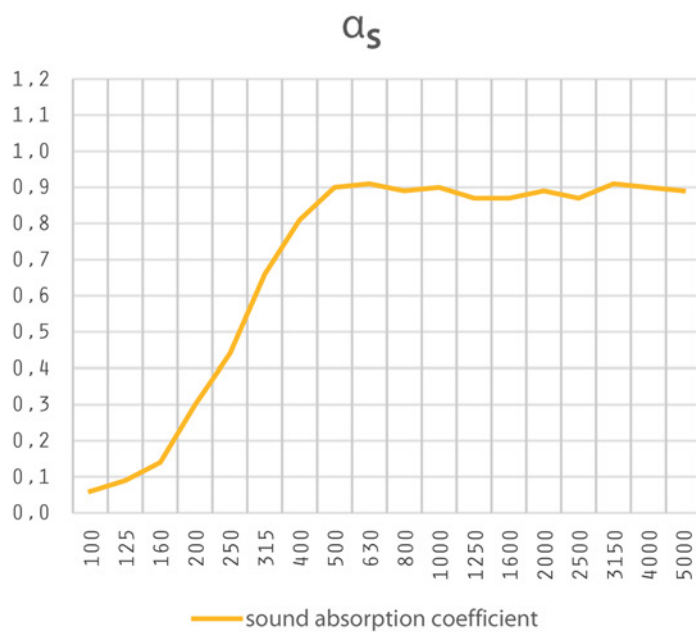
FR standard		
BS 5867 PART 2B / pass DIN 4102 / B1	EN 13773 / class 1 NF P 92-507 / M1	NFPA 701 / pass

Care instructions	Abrasion resistance	Colour fastness to light
	ISO 12947 100 000 cycles	ISO105-B02-2014 note 4-6
Pilling resistance	Tear strength	Tensile strength
ISO 12945-2 note 5	ISO 13937-3: 2000 Warp: 35 N - Weft: 54 N	ISO 13934-1: 1999 Warp: 1300 N - Weft 1100 N

VELOURS ZEUS CS

SOUND ABSORPTION





























f(Hz)	α_s
100	0,06
125	0,09
160	0,14
200	0,30
250	0,44
315	0,66
400	0,81
500	0,90
630	0,91
800	0,89
1000	0,90
1250	0,87
1600	0,87
2000	0,89
2500	0,87
3150	0,91
4000	0,90
5000	0,89
ISO 11654	
$\alpha_w = 0.75(H)$	



100% pleat - 15 cm from the wall (G150)

VELOURS ZEUS CS

AVAILABLE COLOURS

						
0002	0007	0201	0301	1000	1002	1005
						
1015	1033	2010	3001	3002	3016	3027
						
4004	4006	4008	4010	5000	5005	5007
						
5008	5010	5012	6005	6009	6017	6018
						
6025	6026	7004	7010	7021	7044	8004
						
8008	8014	8016	8017	8025		

All colours but black (0007) & red (0201): min. 2 rolls.