

MOLTON CS



Inherently and permanently flame-retardant fabric with minimum shrinkage.

SPECIFICATIONS

Item	Width	Length	Weight	Thickness	Composition
1405	300 cm	± 60 m	320 g/m ²	0.75 mm	100% PES FR

FR standard					
AS 1530.2		DIN 4102 / B1		NF P 92-507 / M1	
AS 1530.3		EN 13501-1 / B-s1, d0		NFPA 701 / pass	
BS 5867 PART 2B / pass		EN 13773 / class 1			
CAN/ULC-S109-14 / pass		GB 8624 / B1			


Only colour 0007 (black) is also NFPA 701 /pass certified.

Care instructions	Airflow resistance	Colour fastness to chlorinated water
	647 Pa s/m	EN ISO 105 - E03:2010 0007 (black): note 4-5
Colour fastness to light	Colour fastness to rubbing (dry)	Colour fastness to rubbing (wet)
DIN EN ISO 105 Note 5 for both sides	DIN EN ISO 105-X12 : 2002 Note 4	DIN EN ISO 105-X12 : 2002 Note 3 - 4

MOLTON CS

SOUND ABSORPTION

f(Hz)	α_s
100	0,01
125	0,03
160	0,12
200	0,28
250	0,48
315	0,61
400	0,71
500	0,77
630	0,79
800	0,66
1000	0,66
1250	0,75
1600	0,75
2000	0,73
2500	0,78
3150	0,80
4000	0,80
5000	0,79
ISO 11654	
$\alpha_w = 0,70$	

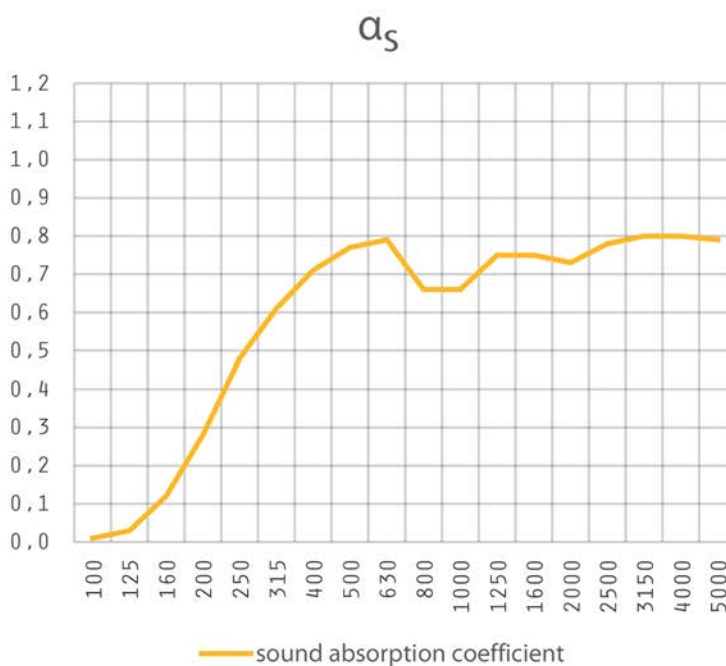

0% pleat - 20 cm from the wall (G200)

AVAILABLE COLOURS

