

CALMUC



This sound-absorbing acoustic fabric is often used as a curtain backing for muting stage noises.

SPECIFICATIONS

Item	Width	Length	Weight	Composition
1450	160 cm	± 60 m	500 g/m ²	100% CO
	300 cm			

FR standard

BS 5867 PART 2B / pass

DIN 4102 / B1

Care instructions




Airflow resistance

colour 0007: 2409 Pa s/m

CALMUC


SOUND ABSORPTION

f(Hz)	α_s
100	0,19
125	0,20
160	0,22
200	0,41
250	0,48
315	0,72
400	0,78
500	0,80
630	0,80
800	0,79
1000	0,76
1250	0,76
1600	0,73
2000	0,71
2500	0,72
3150	0,70
4000	0,70
5000	0,67
ISO 11654	
$\alpha_w = 0,75$	

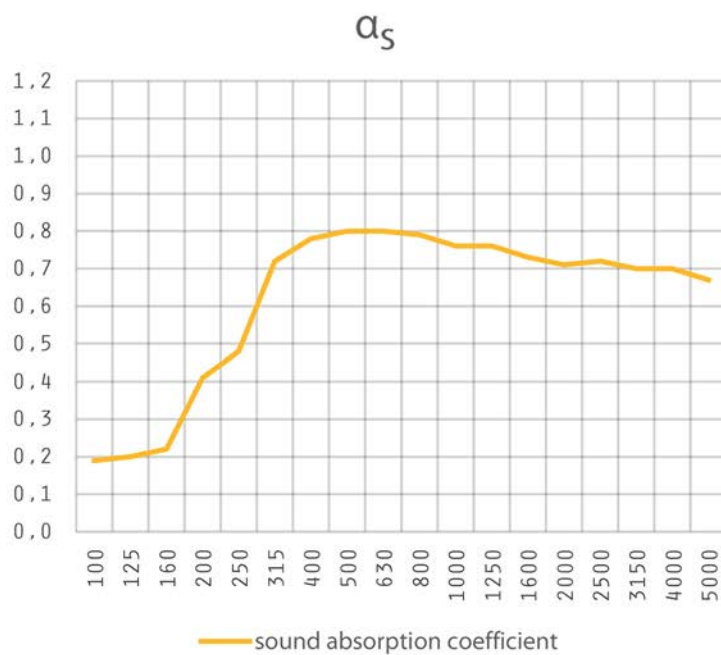


100% pleat - 15 cm from the wall (G150)

AVAILABLE COLOURS



0001



0007