

SONOMESH PRINT



A durable and sound-absorbing material featuring stunning print results!

SPECIFICATIONS

Item	Width	Print width	Length	Weight	Composition
3848	270 cm	265 cm	custom	620 g/m ²	73% PVC + 27% PES


FR standard	
DIN 4102 / B1	EN 13501-1 / B-s2, d0

Colour fastness to chlorinated water	Impact resistance	Tear strength
EN ISO 105 - E03:2010 note 4	EN 13964 Class 1A	DIN 53.363 Warp: 25 N / Weft 25 N

Tensile strength
EN ISO 1421 Warp: 250 N / Weft: 220 N

SONOMESH PRINT


SOUND ABSORPTION COEFFICIENT

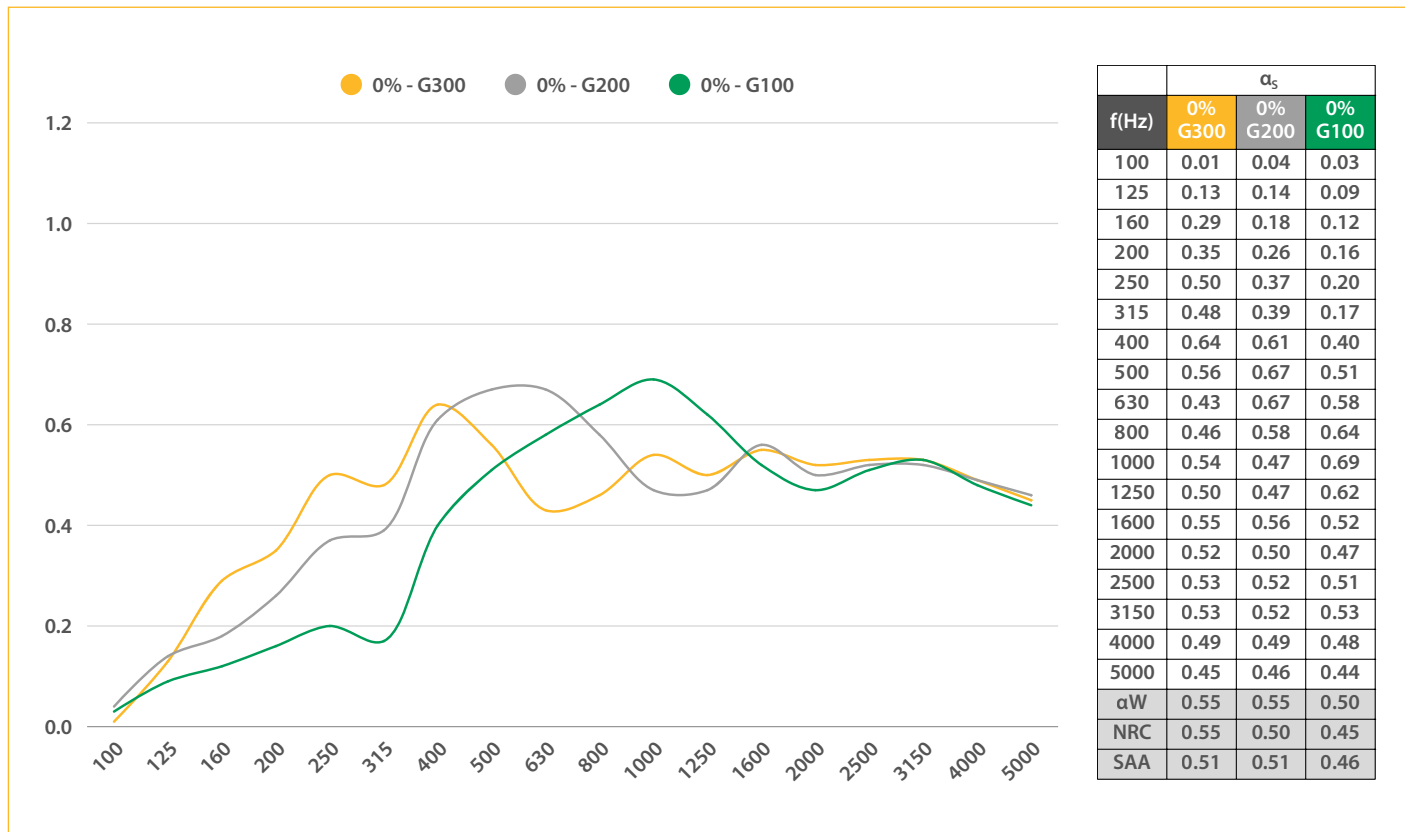

This graph shows the sound absorption coefficient for three curtains tested separately, each hung flat (0% pleat) on a rail in front of a wall:

- G300: 30 cm from the wall
- G200: 20 cm from the wall
- G100: 10 cm from the wall

SONOMESH PRINT

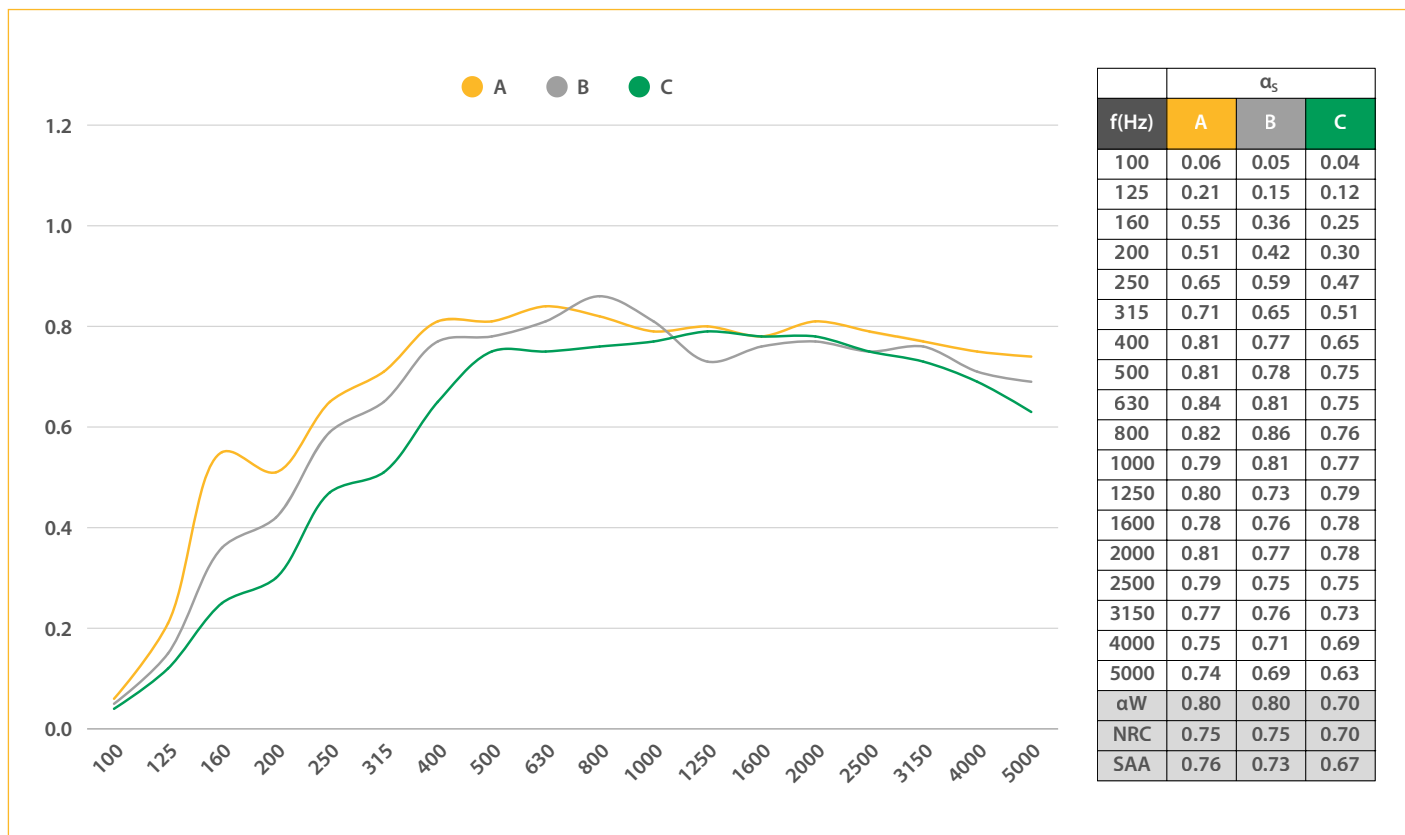

This graph shows the sound absorption coefficient for three separate setups.
Each setup consists of two flat-hung curtains on separate rails in front of a wall:

- Setup A: 40 cm (G400) and 25 cm (G250) from the wall
- Setup B: 30 cm (G300) and 15 cm (G150) from the wall.
- Setup C: 20 cm (G200) and 5 cm (G50) from the wall.