

FP SUPERMAT PERFORATO

TECHNICAL DATA SHEET


February 2024

Perforated version of the FP Supermat front projection screen, for excellent sound transparency. Available in two types of perforation: one for standard viewing distances (0562) and a smaller one for up-close viewing distances (0563). Dimensions refer to the non-tensioned state of the projection surface. Keeps its shape when stretched. Item 0562 has perforations of \varnothing 1.1 mm • Item 0563 has micro perforations of \varnothing 0.5 mm.


» ARTICLE CODE	» WIDTH	» LENGTH	» WEIGHT
4756 0220 0562	220 cm	\pm 100 m	461 g/m ²
4756 0220 0563	220 cm	\pm 100 m	461 g/m ²
» COMPOSITION			
100% PVC			

» FLAME RESISTANCE	
NFPA 701 / pass	EN 13773 / class 1

» **AVAILABLE COLOURS**



0562




0563

FP SUPERMAT PERFORATO


TECHNICAL DATA SHEET

February 2024

» OPTICAL CHARACTERISTICS 0562

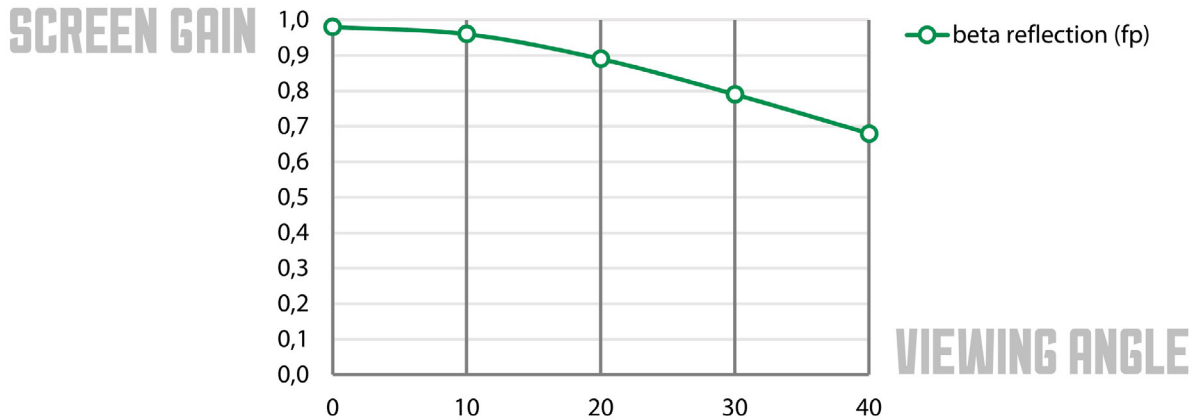

» INSERTION LOSS 0562

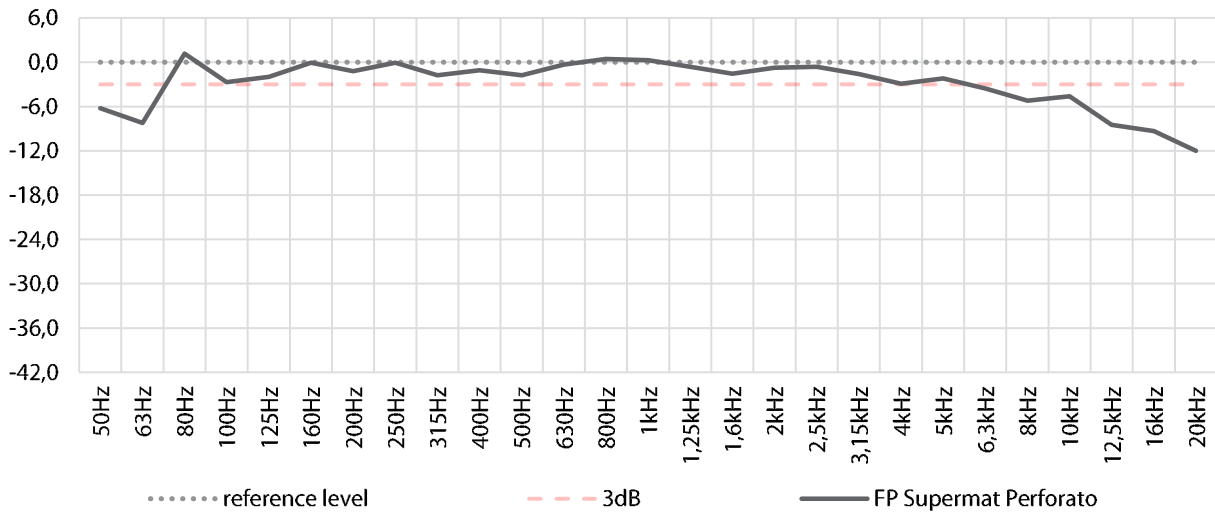


Freq. (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	10000	12500	16000	20000
loss (dBA)	-6,2	-8,2	1,2	-2,7	-2,0	-0,1	-1,2	-0,1	-1,8	-1,1	-1,8	-0,3	0,4	0,3	-0,6	-1,5	-0,8	-0,6	-1,6	-2,9	-2,2	-3,5	-5,2	-4,6	-8,5	-9,3	-12,0

FP SUPERMAT PERFORATO


TECHNICAL DATA SHEET

February 2024

» OPTICAL CHARACTERISTICS 0563

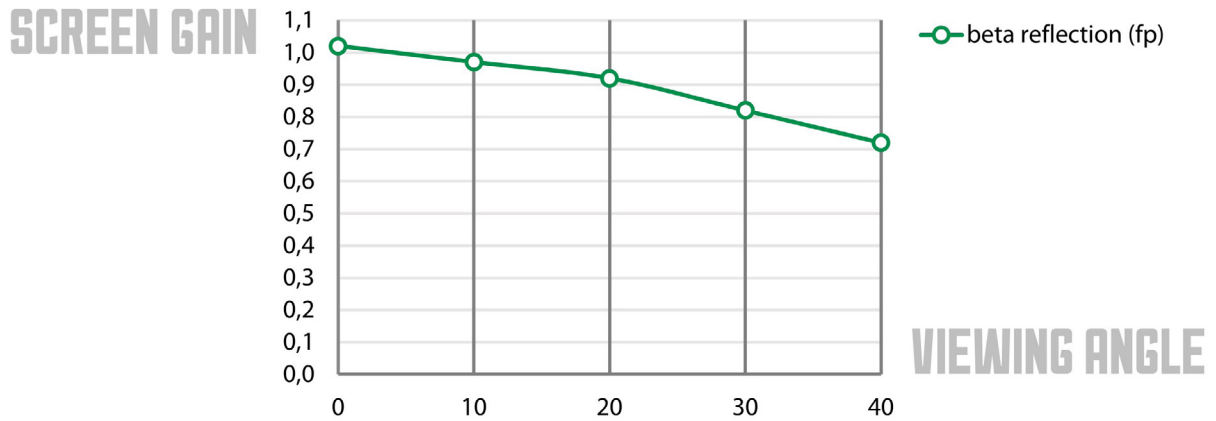

» INSERTION LOSS 0563

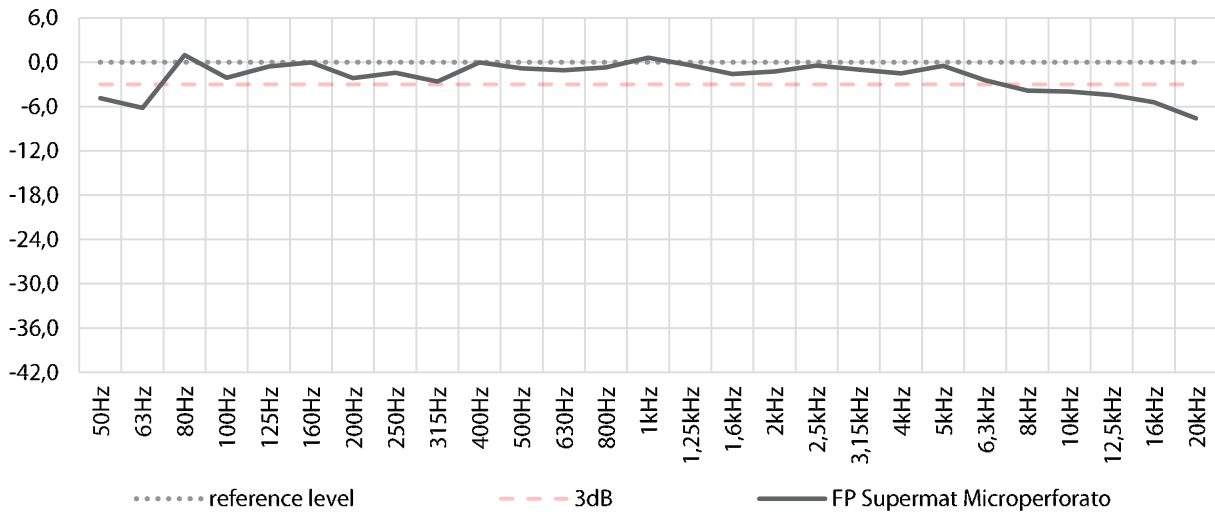

Freq. (Hz)	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	6300	8000	10000	12500	16000	20000
loss (dBA)	-4,9	-6,2	1,0	-2,1	-0,6	0,0	-2,1	-1,4	-2,6	0,0	-0,8	-1,1	-0,7	0,6	-0,4	-1,6	-1,3	-0,5	-1,0	-1,5	-0,5	-2,4	-3,8	-4,0	-4,4	-5,4	-7,6