

VELOURS PARIS CS

TECHNICAL DATA SHEET

July 2023

Velours Paris CS is a permanently flame retardant & heavy weight synthetic stage velvet with upright pile & light satin sheen.

» **ARTICLE CODE**

1208 0140 #

» **WIDTH**

140 cm

» **LENGTH**

± 30 m

» **WEIGHT**

500 g/m²

» **COMPOSITION**

62% TCS

38% PES FR

» **CARE INSTRUCTIONS**



» **FLAME RESISTANCE**

BS 5867 PART 2B (2008) / pass

DIN 4102 / B1

EN 13773 (2003) / class 1

GB 8624-2012 / B1

NF P 92-507 / M1

NFPA 701 (2019) / pass



» **TENSILE STRENGTH**

ISO13934-1: 1999

Warp: 1300 N · Weft 1160 N

» **COLOUR FASTNESS TO LIGHT**

ISO 105-B02-2014

note 4-5

» **ABRASION RESISTANCE**

ISO 12947

100 000 cycles

» **RESISTANCE TO PILLING**

ISO 12945-2

Note 5

» **COLOUR FASTNESS TO RUBBING (DRY)**

NF EN ISO 105-X12 : 2016


Warp: 4-5 · Weft: 4-5

» AVAILABLE COLOURS



SOUND ABSORPTION

full box pleated curtain • 10 cm from the wall

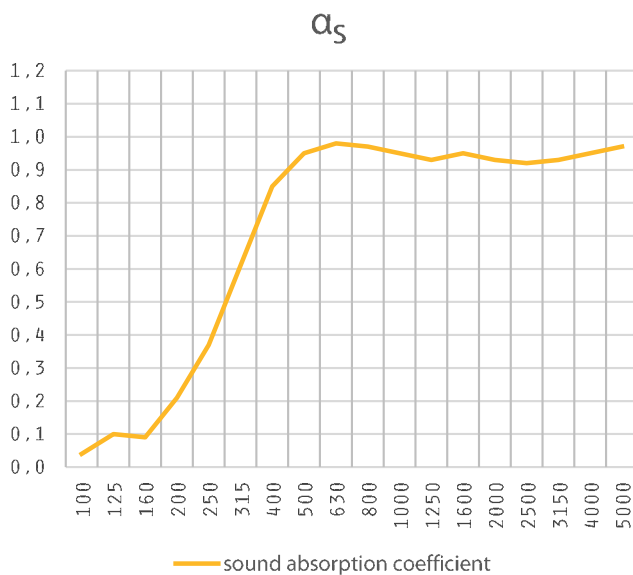

f(Hz)	α_s
100	0,04
125	0,10
160	0,09
200	0,21
250	0,37
315	0,61
400	0,85
500	0,95
630	0,98
800	0,97
1000	0,95
1250	0,93
1600	0,95
2000	0,93
2500	0,92
3150	0,93
4000	0,95
5000	0,97

ISO 11654
 $\alpha_w = 0,70(MH)$